


ÖNİŞA\A\{A\|a&a\A*^cãà\^ã\A\ÜPTA\CC\A\ãSêc\Ë\|ã

SPECIFICATIONS

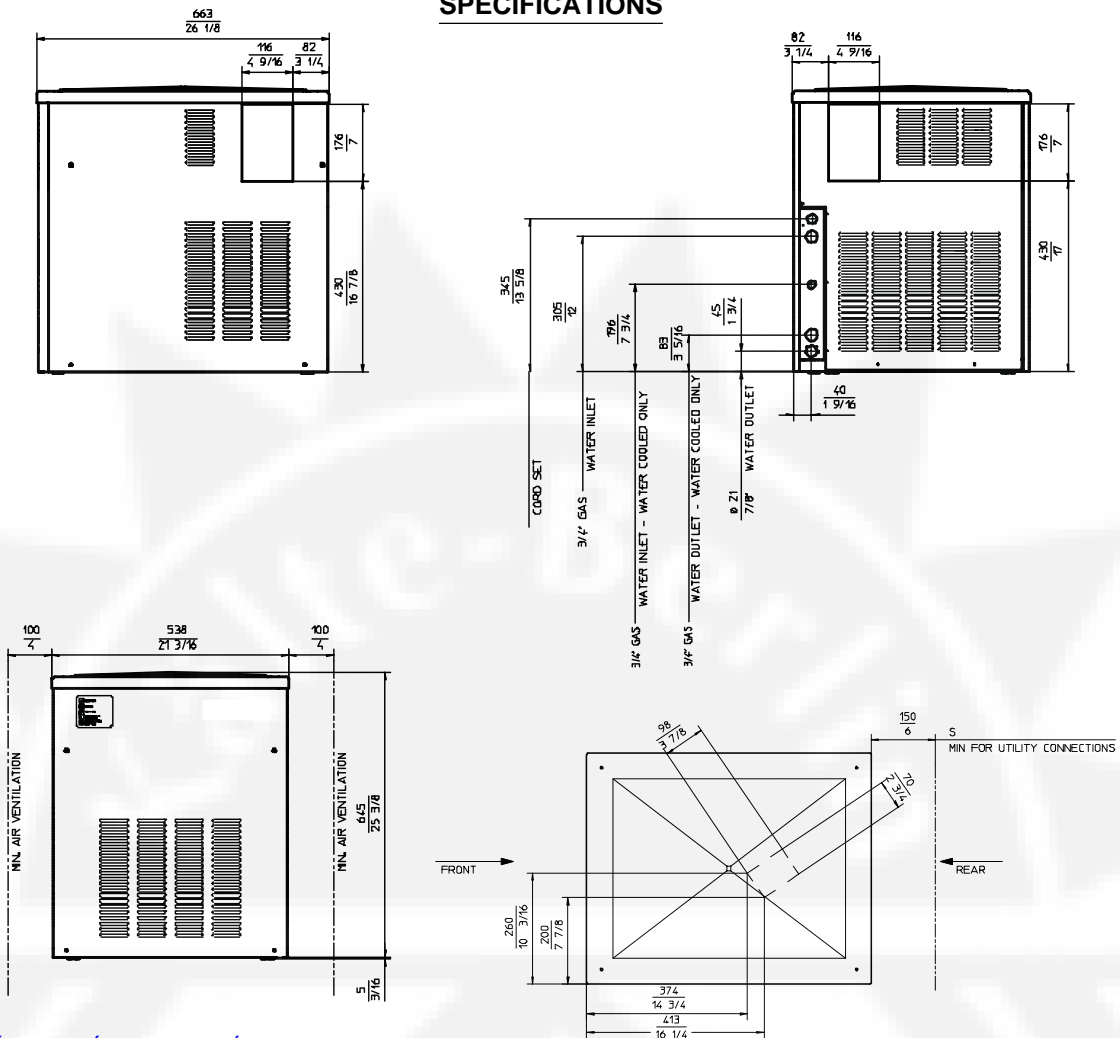

ÖNİŞA\A\{A\|a&a\A*^cãà\^ã\A\ÜPTA\CC\A\ãSêc\Ë\|ã

Sêc\Ë\|ã
 ÖNİŞA\A\{A\|a&a\A*^cãà\^ã\A\ÜPTA\CC\A\ãSêc\Ë\|ã
 FGGE\A\|ã
 ÖNİŞA\A\{A\|a&a\A*^cãà\^ã\A\ÜPTA\CC\A\ãSêc\Ë\|ã
 ÖNİŞA\A\{A\|a&a\A*^cãà\^ã\A\ÜPTA\CC\A\ãSêc\Ë\|ã
 ÖNİŞA\A\{A\|a&a\A*^cãà\^ã\A\ÜPTA\CC\A\ãSêc\Ë\|ã
 ÖNİŞA\A\{A\|a&a\A*^cãà\^ã\A\ÜPTA\CC\A\ãSêc\Ë\|ã

Dimensions:

- HEIGHT (less legs) 645 mm.
- HEIGHT (with legs) 650 mm.
- WIDTH 538 mm.
- DEPTH 663 mm.
- WEIGHT 77 Kg.

SPN 405 - MACHINE SPECIFICATIONS

Model	Cond. unit	Finish	Comp. HP	Water req. lt/24 HR		
SPN 405 AS SPN 405 WS	Air Water	S. Steel	1	320 1800*		
Basic electr.	Amps	Start Amps	Watts	Electric power cons. Kwh per 24 HR	Nr. of wires	Amps fuse
230/50/1	5.2	29	1200	26	3 x 1.5 mm ²	16

* A 15°C water temperature