

AFC 134

Self Contained Ice Machine 143 kg

Item #:
Project:
Quantity:



FEATURES

- Produces "Cubelet" ice (compressed ice flakes). Ice scoop holder located within ice-storage bin.
- Resistant stainless steel exterior.
- Reliable electronic controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only). Optional "Demineralized Water" adaptor kit
- Easily accessible front panel mount ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.



AFC 134
Cubelet 1 g
W 16 x D 15 x H 7-8 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a
R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

44 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 143 kg

AFC 134

Self Contained Ice Machine 143 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 143 kg

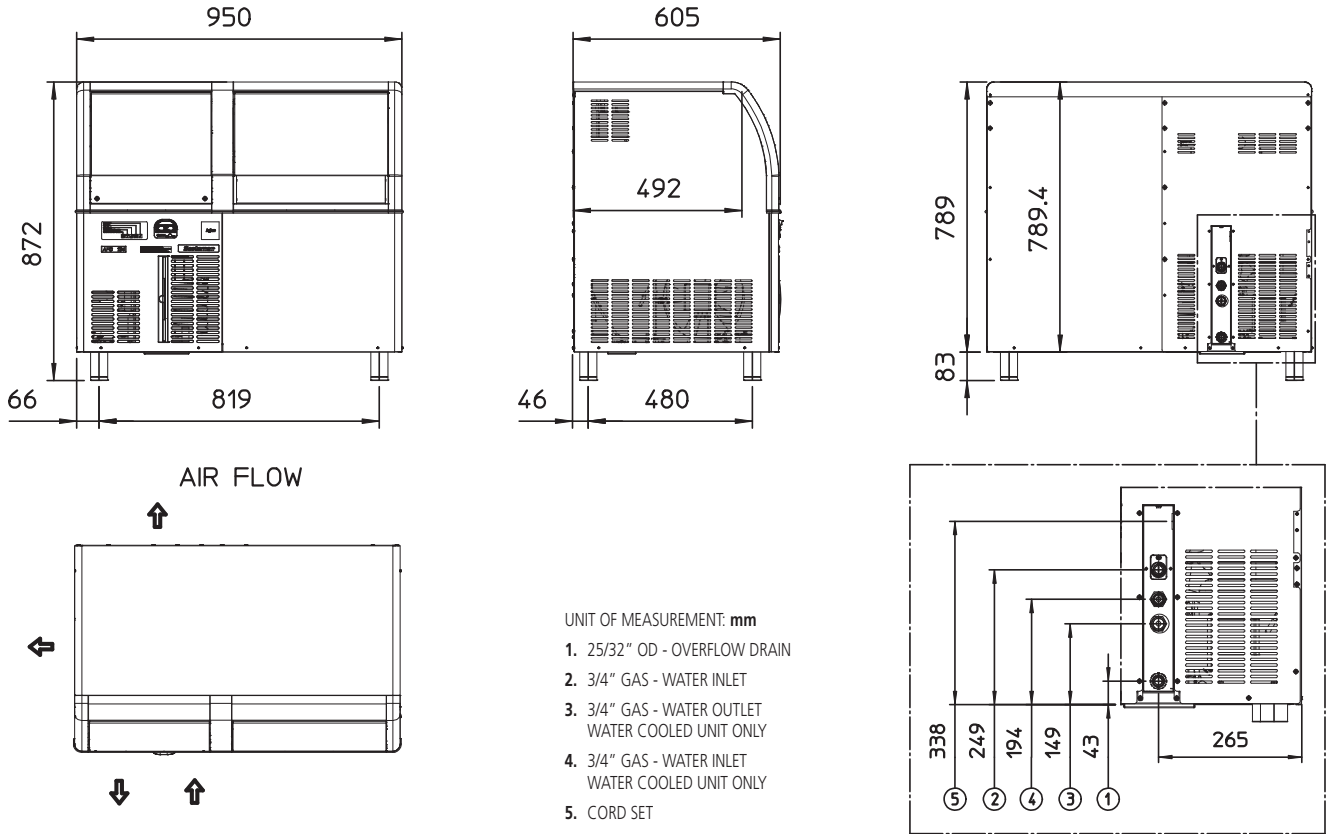

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	950 x 605 x 872 mm	Carton (W x D x H)	1030 x 680 x 960 mm								
Net weight	68 kg	Weight	79 kg								
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm²	A
AFC 134 AS	230/50/1	143	135	104	13.3	13.8	4.6	610	1570	3 x 1.5	10
AFC 134 WS	230/50/1	130	125	110	11.4	12.5	50.0	510	1570	3 x 1.5	10
AFC 134 AS	230/60/1	130	127	92	14.9	13.7	3.8	600	1350	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions