

P120E "B"

Modular electric oven for pizzeria

COMPOSITION WITH 1 BAKING CHAMBER



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- ☐ Leavening prover on wheels, height 800mm
- ☐ Support with wheels, height 600mm
- ☐ Support with wheels, height 800mm
- Support with wheels, height 950mm
- Additional tray holder guides for compartment and support
- Spacer element height 300mm
- ☐ Suction hood

(WITHOUT SURCHARGE)

☐ Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- ☐ Structure made in folded stainless steel
- Side panels in pre-painted sheet metal
- ☐ Stainless steel hood with aluminised steel top cover
- ☐ Front vapour collection hood in enameled steel sheet
- ☐ Steam duct in stainless steel plate
- ☐ Stainless steel double door with bottom hinge and spring balance
- ☐ Tempered glass element
- ☐ Handles in thermoplastic material
- ☐ Control panel on front right hand side

INTERNAL CONSTRUCTION

- Refractory brick cooking surface
- □ Aluminated steel top and side structure
- Rock wool heat insulation

FUNCTIONING

- ☐ Heated by armoured heating elements
- ☐ Electronic temperature management with independent adjustment of ceiling and floor
- Maximum temperatura reached 450°C
- ☐ Continuous with temperature monitorina thermocouple
- Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- ☐ Lighting with halogen lamp
- ☐ Timer
- Economiser
- Independent maximum temperature safetv device
- 20 customisable programs








MORETTI FORNI S.P.A.

www.morettiforni.com info@morettiforni.com Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA Tel. +39.0721.96161 - Fax +39.0721.9616299



P120E "B" 1 baking chamber height 18cm (assembled with support height 950mm)

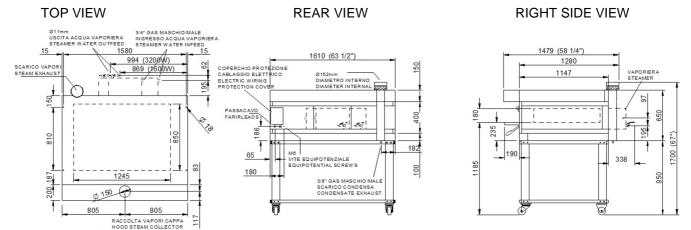

Note: The dimensions indicated in the views are in millimeters. Steamer for Bakery only.

SPECIFICATIONS

The appliance comprises one cooking element and an optional leavening compartment or support. The oven cooking surface is made of refractory, allowing pefect heat distribution over the whole surface and making this oven particularly suitable for use by pizza cooks. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C

All the data provided below refer to the configuration with 1 baking chamber

DIMENSIONS		SHIPPING INFORMATION	FEEDING AND POWER
External height	750mm	Packed in wooden crate	Standard feeding
External depth	1479mm	Height 900m	m A.C. V400 3N
External width	1610mm	Depth 1652m	m Feeding on request
Weight	272kg	Width 1810m	m A.C. V230 3
Baking surface	1,1m ²		g Frequency 50/60Hz
· ·		G	Max power 9,3kW
TOTAL BAKING CAPACIT	Y	When combined with leavening	Average power cons 4,7kWh
_		compartment or support:	Connecting cable
Tray (600x400)mm	4		.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
		Max weight (371+60)	5
Pizza diameter 300mm	11		5x6mm ² (V230 3)
Pizza diameter 450mm	4		Power supply (optional prover)
			A.C. V230 1N 50/60 Hz
			Max power 1,5kW
			Average power cons 0,8kWh
			Conn. Cable type H07RN-F 3x1,5mm ²

^{*} This value is subject to variation according to the way in which the equipment is used

⁻ NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice