

T-23G-HC~FGD01

 Upright Foodservice Refrigerator, 1 Full Glass Swing Door



Dimensions		Build		Technical	
External Width (mm)	686	Door Description	1 Full Glass Swing Door	Refrigerant	R290
External Depth (mm)	750	Door Opening	Right (standard) or Left.	Voltage / Frequency / Phase	220-240V/50-60Hz/1
External Height (mm)	2074	Exterior Construction	Stainless steel front, aluminium sides & rear	Amps	1.3
Exclusions	Depth does not include 42 mm for door handle or 13 mm for rear access panel.	Interior Construction	Clear coated aluminium, stainless steel base	Temperature Class	M1
Net Volume (Litres)	438	Air Intake Position	Front	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Gross Volume (Litres)	651	Ventilation Position	Rear	Testing Standard	EN 23953
Display Area (?)	0.69	Clearance Required	26 mm rear, zero sides	EEC	A
Supplied Shelves	4	Cord Length (Meters)	2.74	EEI	8.5
Shelf Size (L x D mm)	582 x 591	Internal Lighting	LED	kWh/24hr	1.64
Internal Net Height (mm)	1300	Standard w/ Locks	standard	kWh/Annum	602
Unpackaged Weight (kg)	132			Defrost Type	Auto
Packaged Dimensions (W x D x H mm)	909 x 788 x 2134				
Supplied Supports	Ø 64 mm castors (83 mm height)				



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia


0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com



T-23G-HC~FGD01

Upright Foodservice Refrigerator, 1 Full Glass Swing Door

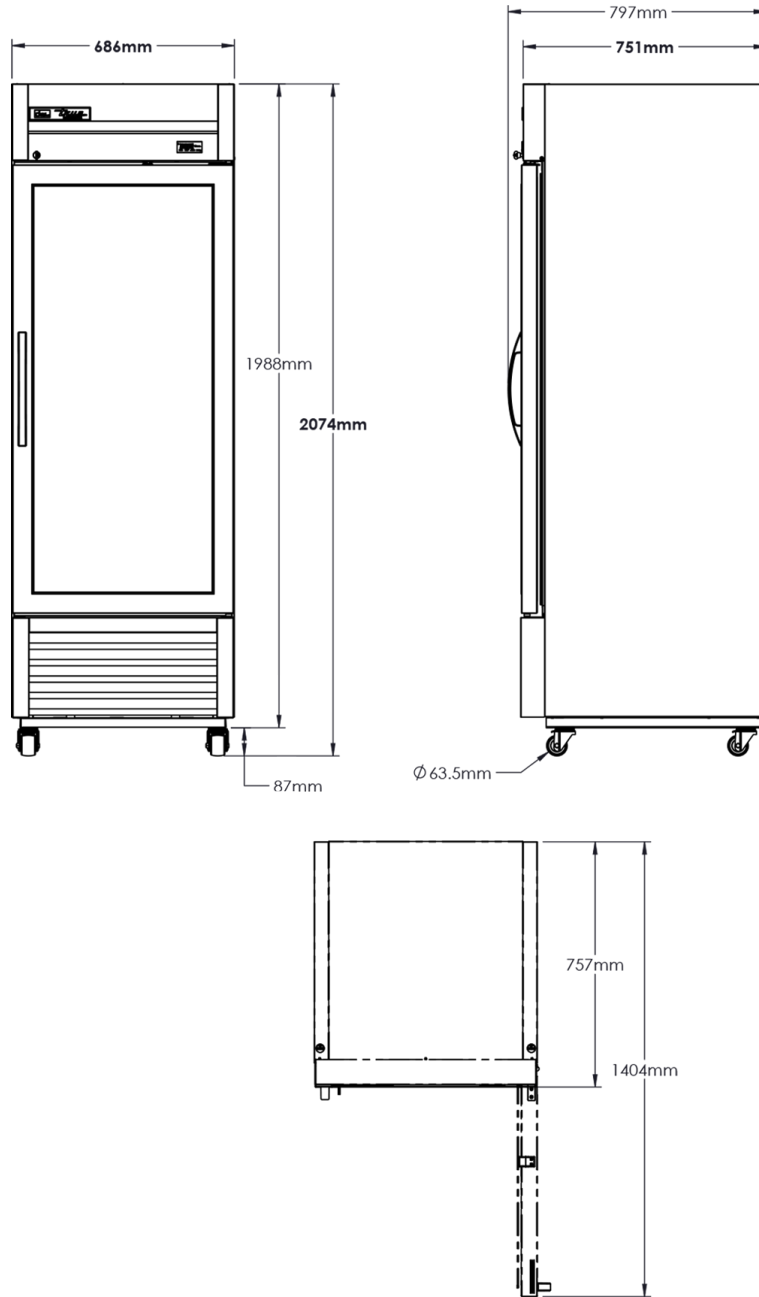

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia

0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com

