

Arctic Pure Plus

Premium Water Filters for Ice Machines

Arctic Pure Plus
Premium Water Filters for Ice Machines

Models AR-PRE-P AR-10000-P AR-20000-P AR-40000-P



AR-PRE-P



AR-10000-P



AR-20000-P



AR-40000-P

- | | | | |
|--|---|--|---|
| <ul style="list-style-type: none"> • Pre-filter, removes hard sediments, sand, dirt and rust from water, and protects solenoids, valves and inlets to the ice maker • Compatible with all models | <ul style="list-style-type: none"> • Chlorine Reduction • SLOW PHOS scale inhibitor • 0.5 Microns filtration • 15,000 gallon capacity • Models 0-600 lbs/day | <ul style="list-style-type: none"> • Chlorine Reduction • SLOW PHOS scale inhibitor • 0.5 Microns filtration • 20,000 gallon capacity • Models 601-1000 lbs/day | <ul style="list-style-type: none"> • Chlorine Reduction • SLOW PHOS scale inhibitor • 0.5 Microns filtration • 40,000 gallon capacity • Models 1001-2500 lbs/day |
|--|---|--|---|

Standard Features and Benefits

- 95% average reduction of chlorine from incoming water supply assures the ice tastes and smells fresher, clearer and more enjoyable
- Silver impregnated carbon block provides antimicrobial protection against potential bacteria microorganisms, algae, mold and slime on ice machine surfaces
- Engineered with SLOW PHOS (slowly soluble polyphosphate) to inhibit scale formation and corrosion
- Reduces dirt, submicron particles (down to 0.5 microns) and eliminates contaminants such as cryptosporidium and giardia cysts.
- Ultra-fine filtration (0.5 Microns) with silver impregnated carbon block and slowly soluble polyphosphates provides triple protection from harmful contaminants that can affect your ice machine's performance
- Reduces ice machine cost and maintenance frequency by reducing scale, impurities, and contaminants that can enter the machine.
- Extends the life of the ice machine, when the filters are changed every 6 months or when water pressure is below 20 psi.
- Optimizes the daily performance of the machine, allowing it run at full capacity producing the freshest and purist ice possible
- Cartridges are easy to install, safe, sanitary and can be changed out rapidly, "on the fly" without turning off the water supply
- **NSF Certified under Standard 42** by the International Association of Plumbing and Mechanical Officials

Certifications

- IAPMO R&T CERTIFIED:
- NSF/ ANSI STD 42: for reduction of Chlorine, taste and Order
- Nominal Particulate Class 1
- NSF/ANSI 53: for Cyst reduction
- NSF/ANSI 372: for low lead content
- CSAB483.1: Verified and substantiated by test data
- * NSF/ANSI 53 cyst claim only valid at or below rated flow rate
- Warning : Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfections before or after the unit




Arctic Pure Plus unique locking manifold

Warranty

3-Year parts and labor warranty on head, shroud, hardware, and mounting assembly.
(water filter cartridge not included).
Residential Warranty - 1 Year



Dimensions

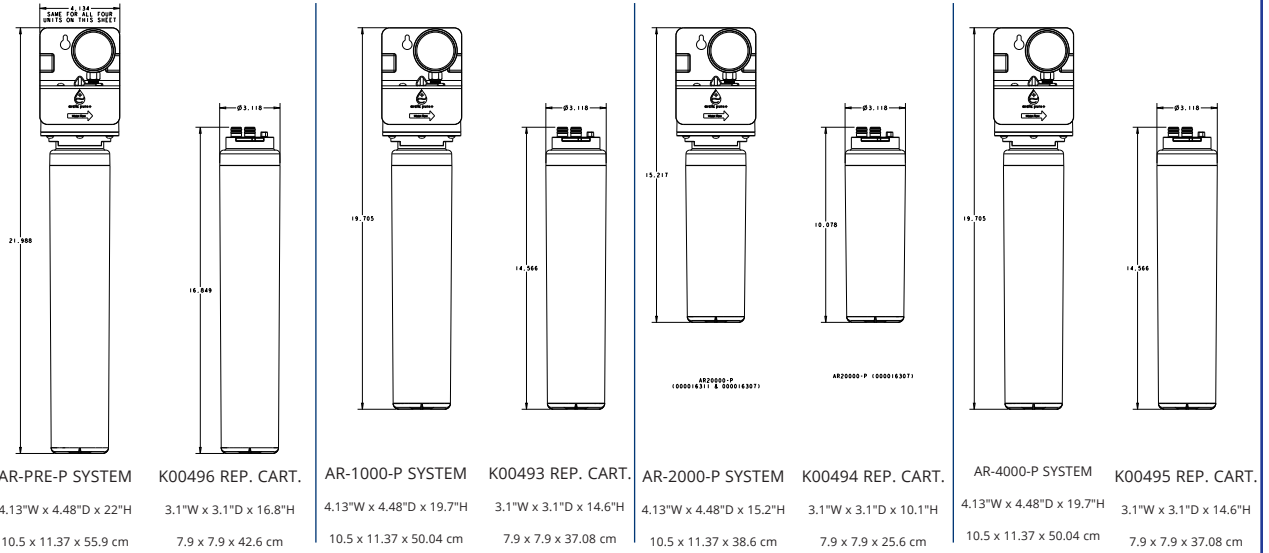

Usage Matrix

Filter System (Replacement Cartridges)	AR-PRE-P (K00496)	AR-10000-P (K00493)	AR-20000-P (K00494)	AR-40000-P (K00495)
All Under Counters (Cubers, Flakers & Nuggets) Counter Top Nugget	X	X		
Modular Cubers: IT0300 - IT750 IP0320 & IP0500 Modular Flaker: RFK0320, RFP0320 Modular Nugget: RNK320, RNP0320	X	X		
Modular Cubers: IT0900 & IBT1020C Modular Flaker: RFK0620, RFP0620, RFK1220C, RFK1300, RFP1300 Modular Nuggets: RNK0620, RNP0620, RNK1020C, RNK1100, RNP1100	X		X	
Modular Cubers: IT1200, IT1500, IT1900, & IF1800C Modular Flaker: RFK2500, RFK2200C	X			X

Specifications and Shipping

System	Replacement Cartridge	Filtration level	Capacity gal	Service Flow Rate (max. gpm (lpm))	Operating Air Temp F (C)	Operating Water Temp F (C)	Operating Pressure psi (bar)	Mtg. Holes from Center in (cm)	Approx. Shipping Weight lbs (kg)	Qty System Lots	Qty Cartridge Lots
AR-PRE-P	K00496	5 Micron	NA	2.5 (9.5)	40°-110°F (4.4°- 43.3°)	40°-90°F (4.4°- 32.2°)	35 -125 (2.41-8.61)	1.5 (3.81)	4 (1.81)	6	12
AR-10000-P	K00493	0.5 Microns	15,000	0.75 (2.84)				1.5 (3.81)	5 (2.26)	6	12
AR-20000-P	K00494	0.5 Microns	20,000	1.25 (4.73)				1.5 (3.81)	4 (1.81)	6	12
AR-40000-P	K00495	0.5 Microns	40000	2 (7.6)				1.5 (3.81)	5 (2.26)	6	12

Installation Tips

- Install vertically with cartridge hanging down
- Allow 2.5" (6.35cm) clearance below the cartridge for easy replacement
- Flush cartridge by running water through filter for ten (10) minutes
- Use copper or polyethylene 3/8" hose for Quick Connect fitting
- Always follow local plumbing codes

Operation Tips

- Change cartridge every 6 months or when pressure gauge indicates below 20 psi (which ever comes first)
- Twist 1/4 turn to left to remove cartridge. Twist 1/4 turn to the right to install cartridge (Water can be left on)
- Protect from freezing—Failure to do so may result in cracking of the filter housing and cause water leakage
- When using non-Manitowoc ice makers, consult the ice machine's manufactures for water supply usage requirements.
- It is recommended to have your water supply tested by a professional to determine your water treatment needs.

Welbilt reserves the right to make changes to the design or specifications without prior notice.