




±60 - ±86 °C



VT 308

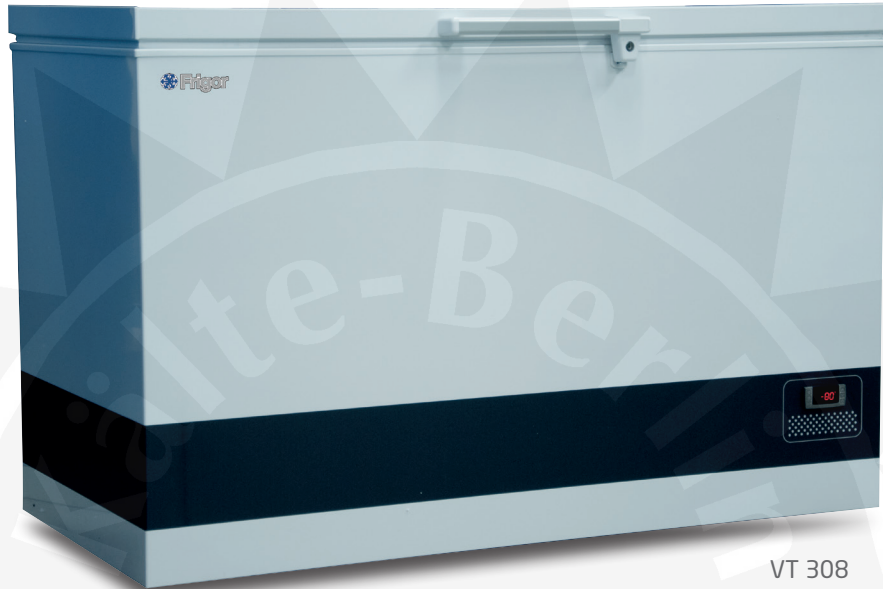

Digital controller



Lock



Castors  
VT 208 / 308 / 408

## Ultra low temperature freezers

VT

### Features

- Digital XR30CX controller
- Warning signal for high or low temperature
- Single compressor low-energy system
- Audible and visual alarm
- Battery backup for temperature display and alarm
- Rack systems

Product specifications	VT 78	VT 208	VT 308	VT 408
Freezing system	Static freezing	Static freezing	Static freezing	Static freezing
Net volume (litre)	71	189	284	368
External dim. (W×D×H / mm)	555 × 645 × 895	920 × 695 × 885	1260 × 695 × 885	1560 × 695 × 885
Temperatur range (°C)	±60 - ±86	±60 - ±86	±60 - ±86	±60 - ±86
Input power (watt)	375	400	400	400
Power consumption (kwh/24t)	6,0	7,4	8,5	10,2
Net weight (kg)	53	64	76	88
Noise level (dB (A))	55	55	55	55