

## Description

Type of luminaire:	0675 1X10/3/5/6/IP44/LED/PC 2/-30/+45°C DOOR STOCK-LAMP WITH LED	Categorie:	.ED Door stock-lamp
Protection degree:	IP 44	Ignition class:	
Mat. of housing:	Aluminium	Fire prot. class:	
Mat. of diffuser:	Makrolon	Colour of reflector:	
Colour of housing:	Light grey	Colour of ring:	
Connection:		Cable length:	0,2 m
Approval:			

## Electrical Data

Number of lamps:	1	Power of lamp:	10W	Voltage:	230V
Frequency:	50/60Hz	Power consumpt:	Appr. 10W	Mains Current:	Appr. 0,095 A
Type of lamp:	LED	Socket:		Compensation:	
Power factor:	cos phi 0,465	TA min.:	-30°C	Through wiring:	
Lamp(s) included:	YES	TA max.:	+45°C	EM-Type:	
Lumen Out:				Dimming-operat.:	
Battery backup:					

## Dimensions see Page 2

Cut out length:	mm	Cut out width:	mm	Cut out diameter:	mm
Mounting height:	mm	Luminaire width:	108 mm	Luminaire height:	66 mm
Luminaire length:	203 mm	Luminaire depth:	mm	Gross weight:	Appr. 1,00 kg
Fitting diameter:	mm			Net. weight:	Appr. 0,90 kg


## Remarks

Protection class 2; DIN VD E0720  
With 1xinlet for cable.  
Diffuser: Makrolon opaque


## Picture



Dimensions

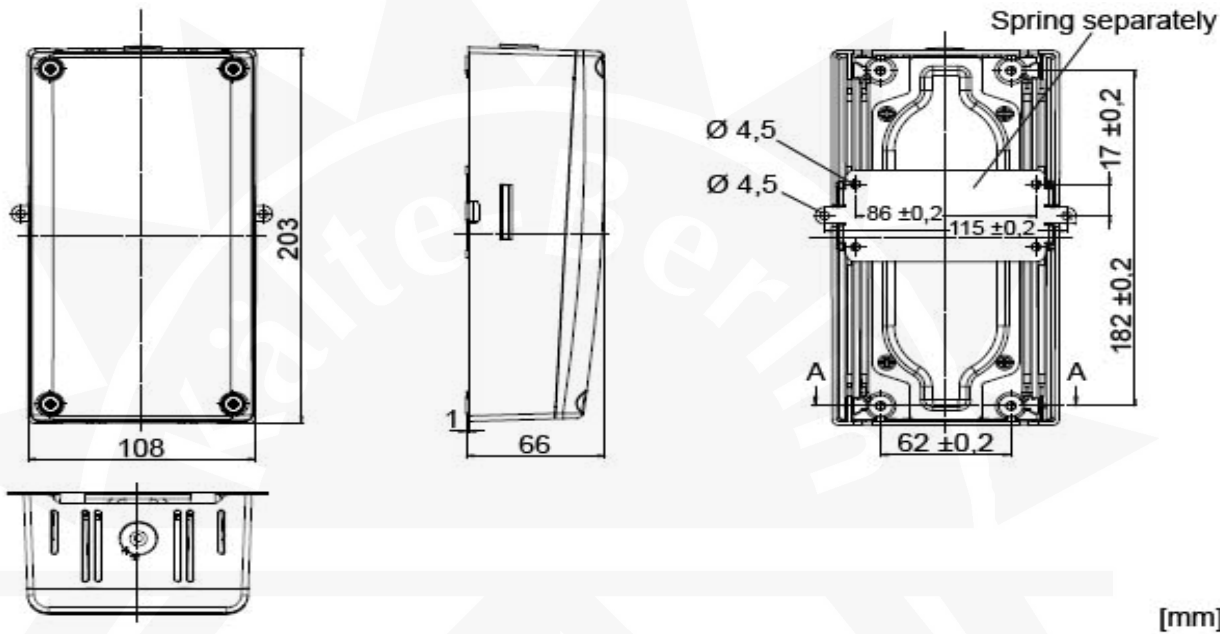

Light distribution curve

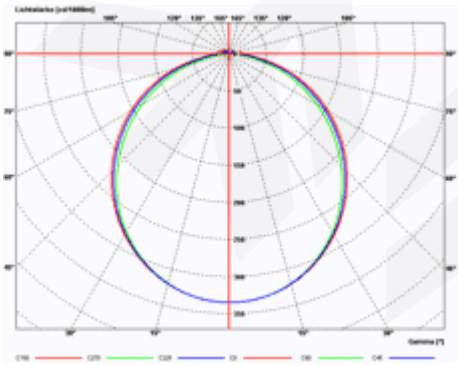

Spare parts

Item-Nr.	Item
on request	

The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent utility model or ornamental design registration.

Customer Art.-No.: .

