

## Self Contained Ice Machine 25 kg

Item #:
Project:
Quantity:



### FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- Legs are not included and must be ordered separately as an accessory.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 47  
Medium Gourmet 20 g  
Ø 30 x H 34 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R290

### VOLTAGE V/Hz/ph

230/50/1

### INTERNAL BIN CAPACITY

9 kg

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.


[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine 25 kg

## Self Contained Ice Machine 25 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 25 kg

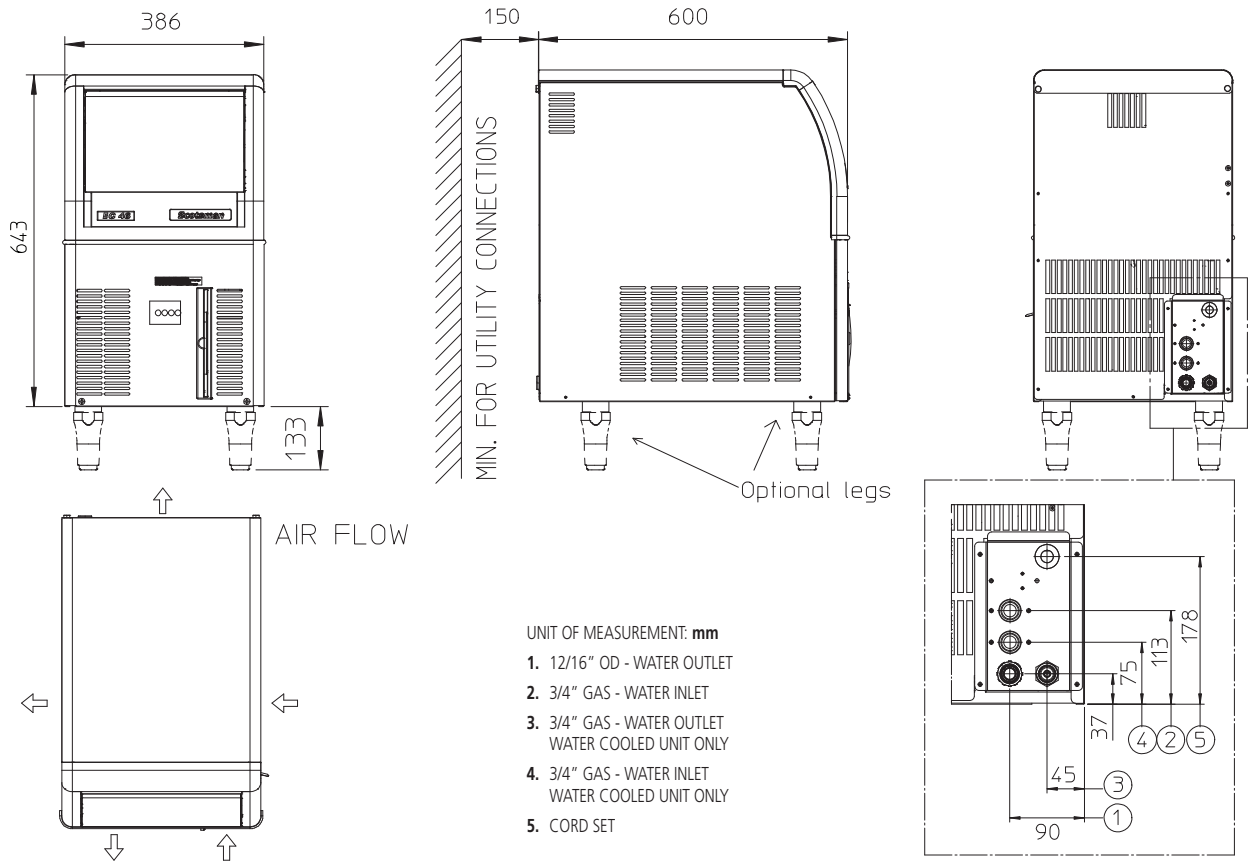

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	386 x 600 x 645 mm	Carton (W x D x H)	460 x 670 x 760 mm								
Net weight	37 kg	Weight	44 kg								
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm <sup>2</sup>	A
ECM 47 AS	230/50/1	25	24	18	32.2	5.8	4.0	320	616	3 x 1.0	10
ECM 47 WS	230/50/1	27	25	21	22.9	4.8	21.4	280	616	3 x 1.0	10

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions