

SCH 30

Self Contained Ice Machine 34 kg



Item
Project
Quantity



FEATURES

- Resistant stainless steel exterior.
- Low power and water consumption
- Reduced dimensions
- Optimum ratio between ice production and bin capacity
- R290 refrigerant
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



SCH L
Large Gourmet 39 g
Ø 38 mm - H 41 mm



SCH M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

CONDENSING SYSTEM

water cooled
air cooled

REFRIGERANT GAS

R290

VOLTAGE

V/HZ/PH
230\50\1

Model	Cube	Ø	H	Weight
SCH L	Large	38 mm	41 mm	39 g
SCH M	Medium	30 mm	34 mm	20 g

OPERATING REQUIREMENTS

CERTIFICATIONS



	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.simag.it

Self Contained Ice Machine 34 kg

May 2025


SCH 30

Self Contained Ice Machine 34 kg



Item
Project
Quantity

Self Contained Ice Machine 34 kg

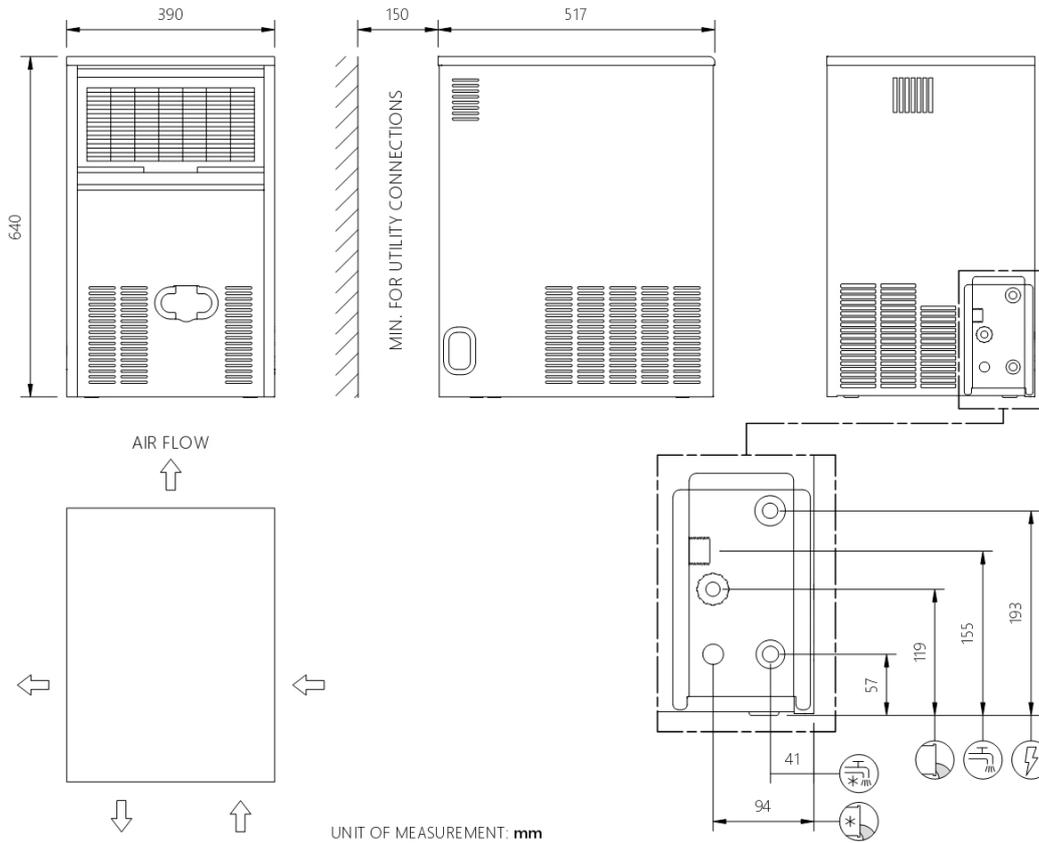

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)									
Net weight			Gross weight									
390 x 515 x 638 mm			460 x 580 x 760 mm									
32 kg			38kg									
Version	Voltage	Condensation	24 h ice production kg			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
			10°C/10°C	21°C/10°C	32°C/21°C							
			kg	kg	kg	kg	kW	kWh/24h	l/h	W	No. x Ømm ²	A
SCH 30 WS	230\50\1	W	34	33	28	8	0,6	6	29	275	3 x 1,5	10
SCH L 30 AS	230\50\1	A	33	30	25	8	0,5	7	4	340	3 x 1,5	10
SCH L 30 WS	230\50\1	W	33	30	27	8	0,6	6	29	275	3 x 1,5	10
SCH 30 AS	230\50\1	A	31	29	25	8	0,5	7	4	340	3 x 1,5	10