

SQH 75

Ice maker with built-in bin, up to 79 kg



FEATURES

- Stainless steel frame with Scotch-Brite finishes
- Vertical Pump and Limescale Prevention System
- Easy access for maintenance
- Significant water and electricity savings
- Excellent balance between ice production and storage capacity
- Dual Defrost System
- R290 Refrigerant
- Compact size



SQH
SQUARE GOURMET 24 g
- H 30 mm

Model	Cubetto	Ø	H	Weight
SQH			30 mm	24 g

CONDENSATION SYSTEM

Air
Water

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1

BIN CAPACITY

KG
30

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE




Models and specifications are subject to change without notice.
The spec sheet is intended for marketing purposes only. For
technical documentation, please refer to our service manuals.

www.scotsman-ice.it



SQH 75



Ice maker with built-in bin, up to 79 kg

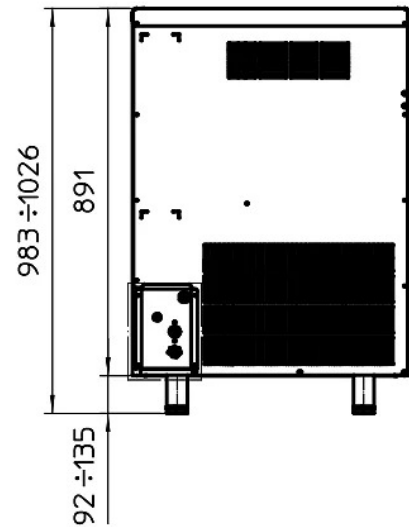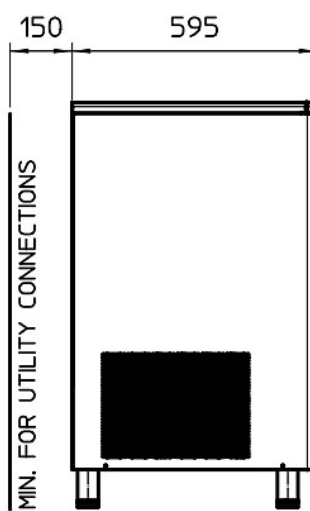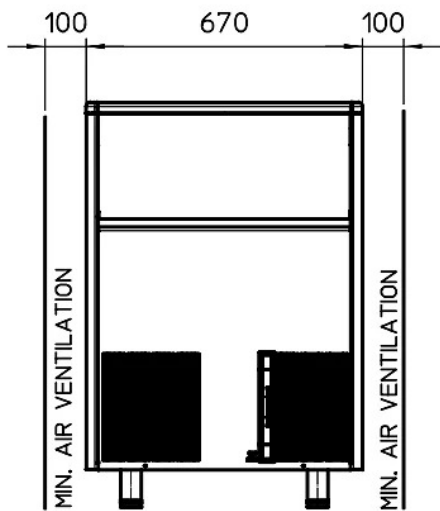

AIR FLOW

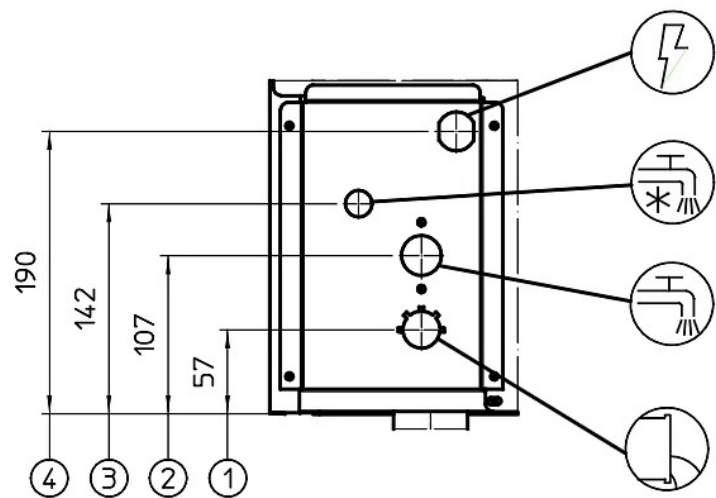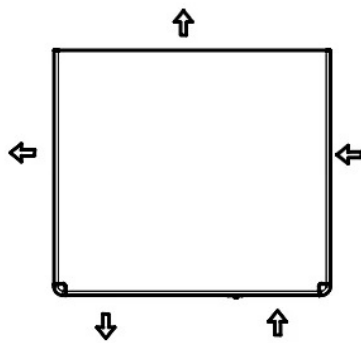

1 Ø21 SCARICO ACQUA

MACHINE SPECIFICATIONS			SHIPPING INFORMATION			(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water					
Dimensions (WxDxH): 670 x 595 x 983 mm			Dimensions (WxDxH): 74 x 67 x 107 cm								
Net weight 61 kg			Net weight 71 kg								
			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
SQH 75 AS 230/50/1	230\50\1	A	79	68	51	1,50	15,0	9,0	750	1,00	10
SQH 75 WS 230/50/1	230\50\1	W	82	72	60	1,50	13,0	67,0	570	1,00	10

SQH 75



Ice maker with built-in bin, up to 79 kg

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
IM0079SSC-NR 3935385 R290	230\50\1	A	79	68	51	1,50	15,0	9,0	750	1,00	10