


# Standing Refrigerator

## OPERATION INSTRUCTIONS

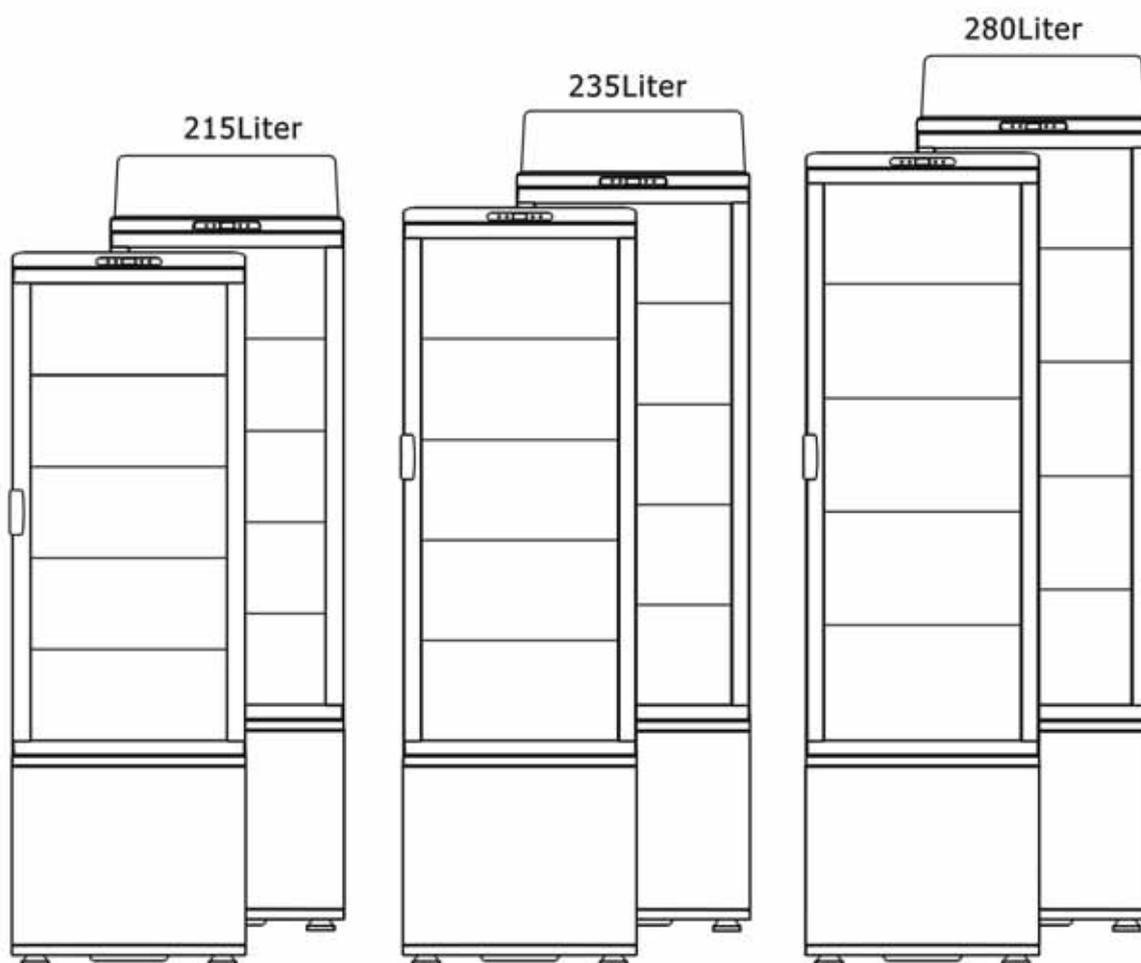

Thank you for choosing and purchasing our product. Please carefully read the operation instructions before use for a correct application and satisfactory effect.


## **Contents**

- 2.** General
- 2.** Structure and Parts
- 3.** Handle and Erection
- 4.** Preparation and Power Supply
- 5.** Use and Caution
- 6.** Maintenance
- 6.** Trouble Shooting
- 7.** Principle of Refrigeration System
- 8.** Circuit Diagram
- 8.** Major Parameters

## General

1. Top brand fully enclosed compressor is used on the refrigerator. The refrigerant R134a or R600a is of an environmentally friendly agent. It features a rational configuration of refrigeration system with blower forced air cooling. The temperature is quite even inside the refrigerator.
2. Double hollow transparent glasses are used on door and body. It features an artistic and elegant appearance, perfect perspective and easy access.
3. It has a wide application in department store and house as well as the meeting room and sitting room.


## Structure and Parts

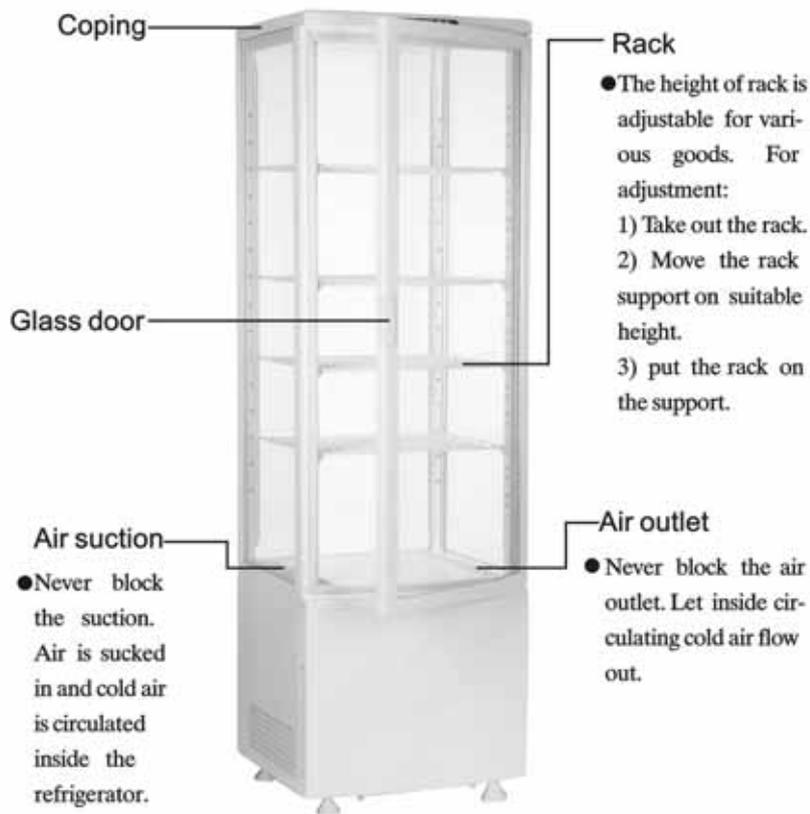

## Handle and Erection

### Handle with care

Unplug the wall socket first.  
Never tilt it over 45 degree during handling.




### Dry place

Always locate the refrigerator at a dry place.




### Sufficient space

The distance from both sides and back of refrigerator to wall or other substance must not less than 10cm. The refrigeration capability might be decreased if its surround space is too small to circulate air.




### Well ventilation

Always locate the refrigerator at a place with fine ventilation. For the first time use, wait for 2 hours after handling and then plug the wall socket and start it.




### Far from heat source

Never place the refrigerator directly under the sunshine. Never locate it nearby any heat source or heater to prevent it from reducing refrigeration capability.




### No heavy load

Never put any heavy load on the top of the refrigerator.



### No hole making

Never make hole on the refrigerator. Never install other matter on the refrigerator.






### Stable location

Unpacking and locate the refrigerator on a flat and solid place.



## Preparation and Power Supply

<p><b>Exclusive power socket</b> Normally, the power supply should be 220-240V single phase AC with exclusive single phase three pin receptacle (250V, 10A) and fuse (6A). The power receptacle must have a reliable earth connection.</p> 	<p><b>No share on socket</b> Never let the refrigerator share the common socket with other appliance, otherwise the cable becomes hot and fire might be resulted</p> 
<p><b>Protect cables</b> Never break or damage the cables otherwise current leakage and fire might be resulted.</p> 	<p><b>No water flushing</b> Never give the refrigerator surface a flush otherwise current leakage might be resulted.</p> 
<p><b>Prevent from flammables and explosive</b> Never put any flammable or explosive inside the refrigerator such as ether, gasoline, alcohol, adhesive and explosive. Never put dangerous product nearby the refrigerator.</p> 	<p><b>No spray</b> To spray the flammables such as paint or coating nearby the refrigerator is not allowed, otherwise fire might be resulted.</p> 
<p><b>After power break</b> After power break or unplugging the refrigerator, always wait at least 5 minutes and then you may plug the refrigerator and start it again.</p> 	<p><b>No medicine</b> No medicine is allowed to keep inside the refrigerator.</p> 


## Use and Caution

### 1. Before use:

Plug the refrigerator on 220-240V~ exclusive socket.

After the refrigerator running, put hand on the air suction to confirm it is sufficient cold. Then you may put food inside the cold box.

### 2. Digital Temperature controller:

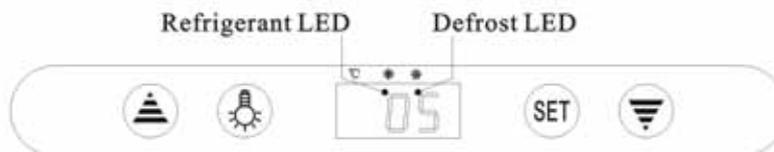

### Features Of Function

- It is a mini-sized and integrated intelligent controller and applicable to the compressor of one Hp.
- The main functions are: Temperature Display/ Temperature control/Manual, automatic defrost by burning off/Illumination Control/Value Storing/self Testing/parameter Locking.

### Front Panel Operation

#### 1. Set temperature

Press button, the set temperature is displayed.

Press or button to modify and store the displayed value,

Press button to exit the adjustment and display the cold-room temperature.

2. If no more button is pressed within 10 seconds, the cold-room temperature will be displayed.

3. Illumination: Press button, it lights; Press again, it stops.

Manual start/stop defrost: Press button and hold for 6 seconds to defrost or stop defrost.

4. Refrigerant LED: During refrigeration, the LED is on; When the cold room temp. is constant, the LED is off; During the delay start, the LED flashes.

5. Defrost LED: during defrosting, the LED is on; When it stops defrosting, the LED is off; During the delay display of defrost, the LED flashes.

#### 3. Cautions:

Shorten the door open time and reduce open frequency is good to keep a cold temperature inside the refrigerator.

Never block the air suction and outlet. Keep air circulation and refrigeration capability.

Do not make food congested as it will influence the cooling effect. Adjust the rack height for proper food storage.

Cool the hot food down to room temperature before you put it into the refrigerator.

Try to reduce the open times and keep refrigerator inside cold in case the power is cut off.

Only skilled service man is allowed to repair the damaged power cable with special tools.

Never touch compressor to avoid from scald.

## Use and Caution

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

The operation manual are not suitable for the persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge.

## Maintenance

### 1. Notice:

Often keep the refrigerator clean and periodical maintenance is necessary.

Always unplug the socket before maintenance.

Never use damaged plug or loose socket to prevent from electric shock or short circuit.

Never flush the refrigerator. Never use alkali detergent, soap, gasoline, acetone or brush.

### 2. Clean outside:

Dip soft cloth in neutral detergent(table ware detergent) to clean the outside of the refrigerator and then wipe it with dry soft cloth.

### 3. Clean inside:

Take rack out for cleaning with water.

### 4. Shut down refrigerator for a long time:

Take all food out and unplug the wall socket.

Clean both inside and outside of the refrigerator thoroughly and open the door for sufficient dry.

The glass breaks easily. Keep the glass far from children.

Clean the condensate tray and wipe it dry.

## Trouble Shooting

<b>Trouble</b>	<b>Cause and Remedy</b>
No refrigeration	Is the plug in socket well? Is the fuse broken? Is there no power?
Unsatisfactory refrigeration	Is it under the sunshine?Is there any heat source nearby? Is the surrounding ventilation bad? Does the door close well?Does door open for a long time? Is the door seal strip deformed or damaged? Is food congested or too much? Does food block the air suction or outlet? Regulate the temperature controller.
Much noise	The refrigerator does not level. The refrigerator contacts wall or other matter. There is loose part in refrigerator.
Contact local service agent for help if simple trouble shooting does not solve the problems.	

## Note


### Following phenomena are not troubles:

The murmur of water is heard when the refrigerator is working. It is a normal phenomenon as the coolant is circulating in the system.


In wet season, condensation might be found on the outside of the refrigerator. It is not a trouble, which is caused by high humidity. Simply use cloth to wipe it.

## Principle of Refrigeration System

The principle of compression refrigeration consists of "compression", "condensation", "throttling" and "vaporization". The compression is undertaken by compressor, the condensation is completed by condenser, The throttling is executed by capillary and the vaporization is implemented by evaporator. When the coolant is circulating in the closed refrigeration system, the compressor sucks coolant, which has absorbs heat in evaporator, the coolant becomes a high pressure and high temperature gas. In condenser, it dissipates heat in air, while the coolant is reliquefied and throttled in capillary and then enters into evaporator with low pressure. the liquefied coolant quickly boils and vaporizes into gas when the pressure suddenly drops. Meanwhile, it absorbs heat inside the refrigerator. And the compressor sucks the low pressure and low temperature gaseous coolant,.....It is circulating in this way up to realization of intended refrigeration.

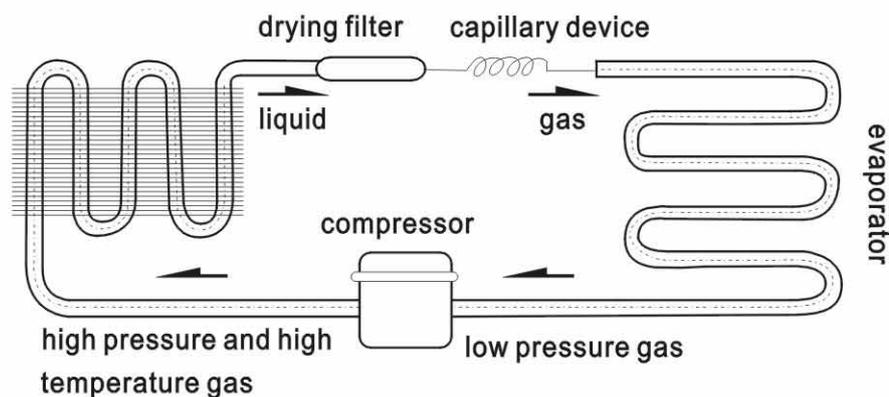

## Circuit Diagram

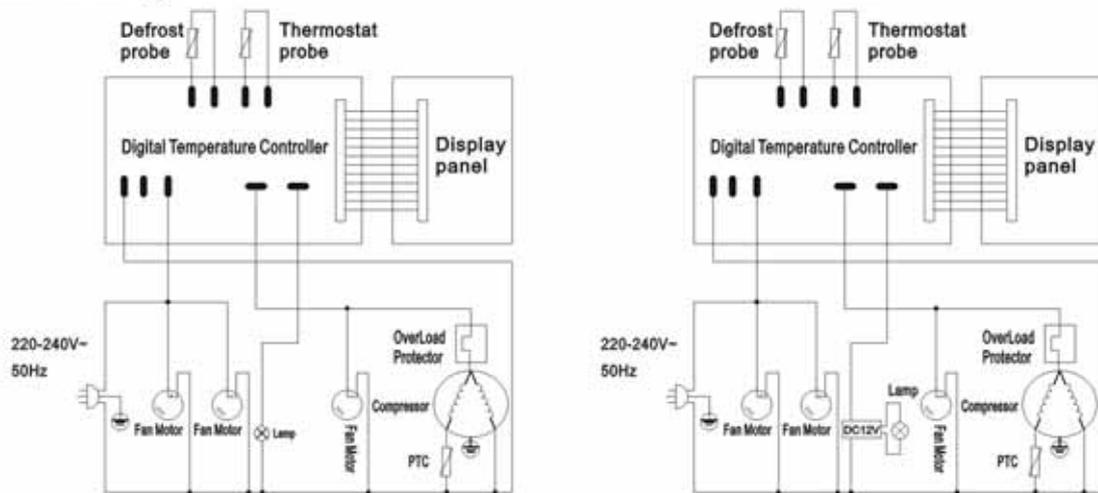

## Major Parameters

Parameter	Model	RT-215L/RT-215L-2	RT-235L/RT-235L-2	RT-280L/RT-280L-2
Coolant and injection quantity(g)		R134a(150)	R134a(150)	R134a (280)
General Rated input power(W)		250	250	320
Type of climate		N	N	3
Rated current(A)		1.5	1.5	2
Electric shock protection class			I	
Refrigeration temperature(°C)			0-12	
Lamp power(W)			11(T4),1.44/PC(LED)	
Rated voltage(V)			220-240~	
Rated Frequency(Hz)			50	
Total effective volume(L)		215	235	270
Net weight(kg)		73/75	76 /78.4	89/90.5
Overall dimension (mm) (LxWxH)		515x485x1590 515x485x1735	515x485x1690 515x485x1835	515x485x1895 515x485x2035

Parameter	Model	RT-215B/RT-215B-2	RT-235B/RT-235B-2	RT-280B/RT-280B-2
Coolant and injection quantity(g)		R600a(100)	R600a(100)	R600a(120)
General Rated input power(W)		250	250	300
Type of climate		N	N	3
Rated current(A)		1.5	1.5	1.8
Electric shock protection class			I	
Refrigeration temperature(°C)			0-12	
Lamp power(W)			11(T4),1.44/PC(LED)	
Rated voltage(V)			220-240~	
Rated Frequency(Hz)			50	
Total effective volume(L)		215	235	270
Net weight(kg)		73/75	76 /78.4	89/90.5
Overall dimension (mm) (LxWxH)		515x485x1590 515x485x1735	515x485x1690 515x485x1835	515x485x1895 515x485x2035

## Note

1. The electric circuit diagram and parameters on the product name plate are final ones if they have been changed.
2. The design might be in proved without notice.
3. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.



**WARNING :** Refrigerant is facility burning of R600a, please protect against fire.



Meaning of crossed out wheeled dustbin:

Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities.

Contact you local government for information regarding the collection systems available.

If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

When replacing old appliances with new ones, the retailer is legally obligated to take back your old appliance for disposals at least free of charge.